

OCV Technical Fabrics



Owens Corning Composites Materials, LLC 43 Bibber Parkway Brunswick ME 04011

Jeff Randall Phone: (207)373-7226 Fax: (207)373-7296


Technical Data Sheet

Date: 17-Jul-2013

BX0810lld/05A12

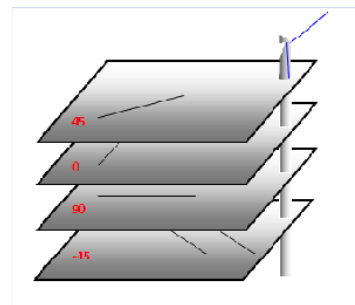
Revision: AN

X2400/V1012



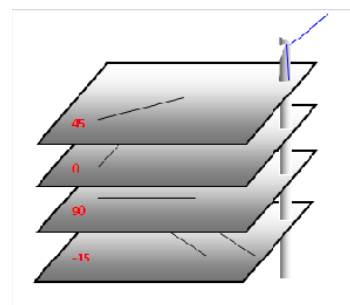
Layer Name	1	2	3	4	5
Fiber Orientation	(-45°)	(0°)	(90 ± 2°)	(+45°)	Stitch Yarn
G/M ²	393 +4/-3	2 ± 10%	20 ± 10%	393 +4/-3	8.8 ± 10%
Thread Count Per CM	4.653	0.3	0.739	4.653	1.97
Thread Weight (Tex)	600	68	300	600	7
Material	Advantex®	E Glass	Advantex®	Advantex®	White Yarn
Manufacturer	OC_AM	SG	OC_AM	OC_AM	BR_02
Filament Diameter	17 µ	9 µ	16 µ	17 µ	-
Sizing Compatibility	EP	UP,EP,VE	EP	EP	-
Sizing Type	SE1500	TD22	SE1500	SE1500	Polyester

Σ GSM Total(g/m2)	817
Stitch Type	Chain
Stitch / CM	3.38
Pilot yarn color (note location)	For 127cm and 254cm slits ONLY: Double yellow tracer yarn down each side of each slit @25mm from each edge.
Roll width (mm)	See production schedule
Roll length (m)	137.2 ± .5 for 127cm, 173 ± .5 for 254cm
Roll weight (kg)	144 @127cm, 362 @254cm, 23.8 kgs @ 21cm
Core inside diameter (mm)	76
Roll per pallet	9 for 127cm, 5 for 254cm (3-2), 6 for short roll 254cm (3-3)
Machine Manufacturer	Mayer #3 #17 #13
Shelf Life	It is recommended products be used within 12 months of fabric manufacturing date
Storage Conditions	Store in a dry area with ambient temperature, optimally, from 8-26C and relative humidity 70% or less, in original packaging. 48 hours prior to use, Fabric should be stored in the workshop, in original packaging to acclimate and prevent condensation.

Technical Data Sheet**Date:** 17-Jul-2013**BX0810lld/05A12****Revision:** AN**X2400/V1012**

Certificate special notes

This product complies with GE specification A50WE007 revision E

Technical Data Sheet**Date:** 17-Jul-2013**BX0810lld/05A12****Revision:** AN**X2400/V1012**

Products slit to width from this fabric

Product SAP Number	Width	Length	Length Min	Length Max
552630	254	173.5	173	174
551018	127	137.2	136.7	137.7
552230	15	137.2	136.7	137.7
551017	21	137.2	136.7	137.7
551016	20	137.2	136.7	137.7
551015	10	137.2	136.7	137.7